



CIPET


ACOUSTICAL

WALL PANEL



**CREDESCENCE**  
*We The Trust*

**World Most trusted**  
**100 % Made In India Brand**

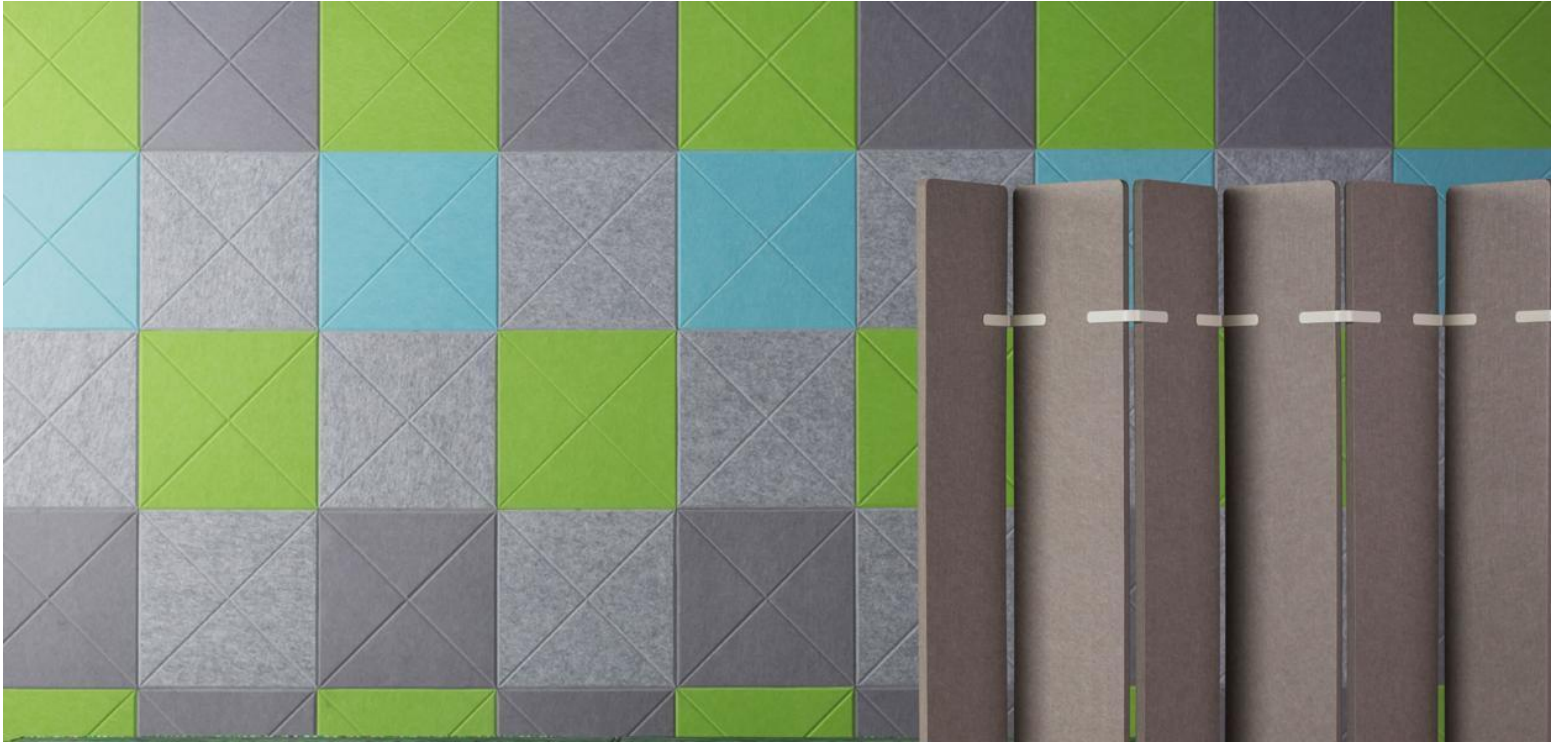


### BENEFITS

- Excellent Sound absorption (NRC 0.7-0.9 )
- Highly decorative
- Moisture proof & light weight
- Environment friendly

### AREA OF APPLICATION

- Auditoriums, Conferences Rooms
- Seminar Hall, Libraries, Indoor Stadium
- Cinema Hall, Home Theater
- Studio , Study room, Pubs

## TECHNICAL DATA



MADE OF RECYCLED  
PLASTIC BOTTLES



BEST ACOUSTIC  
PERFORMANCE



EASY TO CLEAN



HUMIDITY  
RESISTANCE



RECYCLABLE  
& RECYCLED



MULTIPLE  
COLOUR OPTION




FIRE RETARDANT

## TECHNICAL DATA

Sizes of Wall Panel	1220mmx2420mm, 600mmX1200mm, 600mmX600mm, 300mmX1200mm, Other sizes can be custom ordered *
Sizes of Ceiling Tile	600mmx600mm, 600mmx1200mm, 1200mmx1200mm, 1200mmx2400mm, Other sizes can be custom ordered *
Thickness	10mm,20mm
NRC	0.7 - 0.95
Density	135 kg/m <sup>3</sup> -- 200 kg/m <sup>3</sup>
Edges	Square, Bevel
Fire Resistance	B1 Class A
Colour	Multiple Colour Range
Primary Material	100 % Polyethylene Terephthalate (PET) ( 100 % Recyclable – Conventional)

## TECHNICAL DATA

### NRC CHART

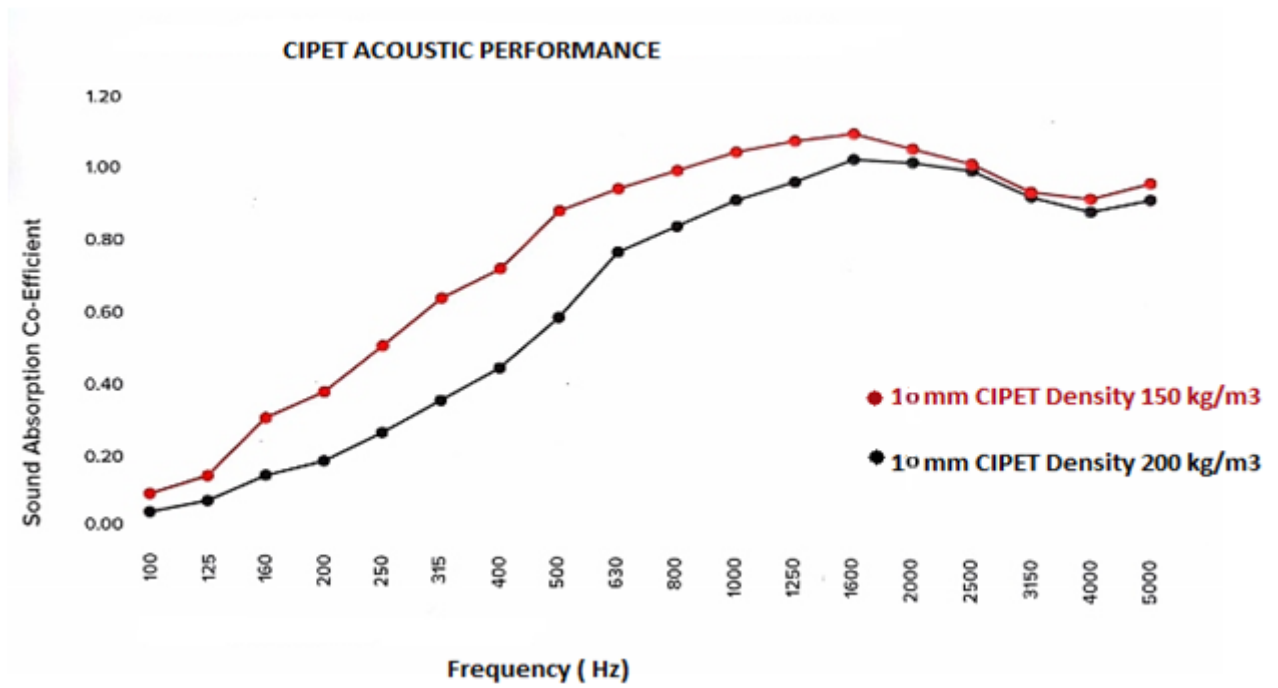

## COLOUR OPTIONS

## CREDENCE CIPET COLOUR SERIES



CIPET-W01

CIPET - W02

CIPET -W03

CIPET- W04

CIPET- W05

CIPET-W06

CIPET-W07



CIPET-B01

CIPET-B02

CIPET-B03

CIPET-B04

CIPET-B05

CIPET-G01

CIPET-G02



CIPET-G03

CIPET-G04

CIPET-G05

CIPET-G06

CIPET-P01

CIPET-P02

CIPET-P03



CIPET-R01

CIPET-R02

CIPET-R03

CIPET-Y01

CIPET-ZB

## INSTALLATION

CIPET ACOUSTIC WALL PANEL CAN BE EASILY SCREWED OR PASTED WITH AN ADHESIVE OVER EXISTING WALL OR ANY FRAMEWORK.

## OPTION- 1 INSTALLATION WITH ADHESIVE

CIPET Wall Panel can be affixed to the wall using good quality construction adhesive, as follows:

1. Clean the surface & remove surface imperfections/loose particles to enable greater bonding of the adhesive
2. Mark the location of each panel on the wall
3. Apply adhesive using spray gun or by brush smoothly on the back of the panel and on the wall
4. Carefully align the wall panels on the marked location on the wall and press the panel against the wall till it is fixed tightly.




## OPTION- 2 INSTALLATION WITH SCREW :

1. Mark the location of each panel on the wall
2. Carefully align the wall panels on the marked location, screw near to edges of the panel, Apply same colour paint on the face of screw.

## APPLICATION & REQUIRED VOLUME

### FOR OFFICE & COMMERCIAL SPACE

15-25 % Wall paneling of CIPET is sufficient for a noise free environment of work place to enhance the work capability

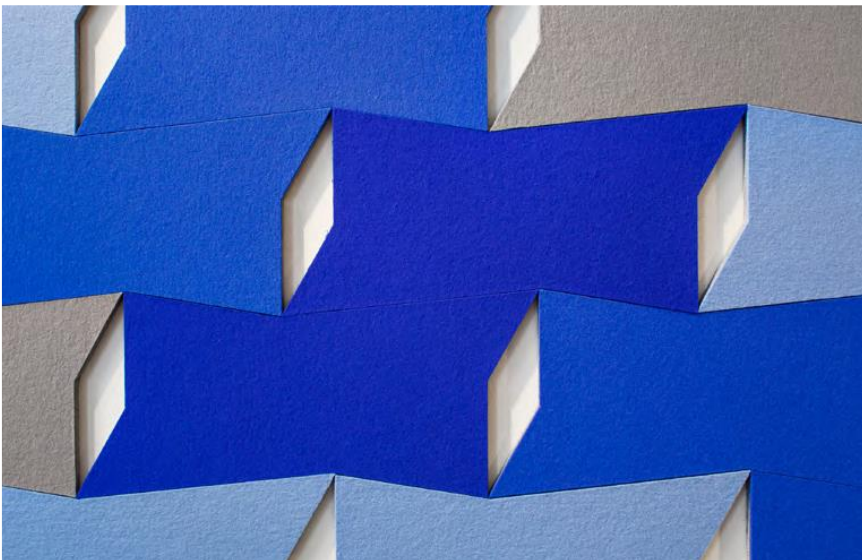


### FOR AUDITORIUMS & CINEMA HALLS

60-80% coverage of the CIPET wall panel is sufficient to maintain the required reverberation time

### FOR HOME THEATER

35-50 % covering is sufficient for the small home theater, Studio to maintain good sound effects within the premises.

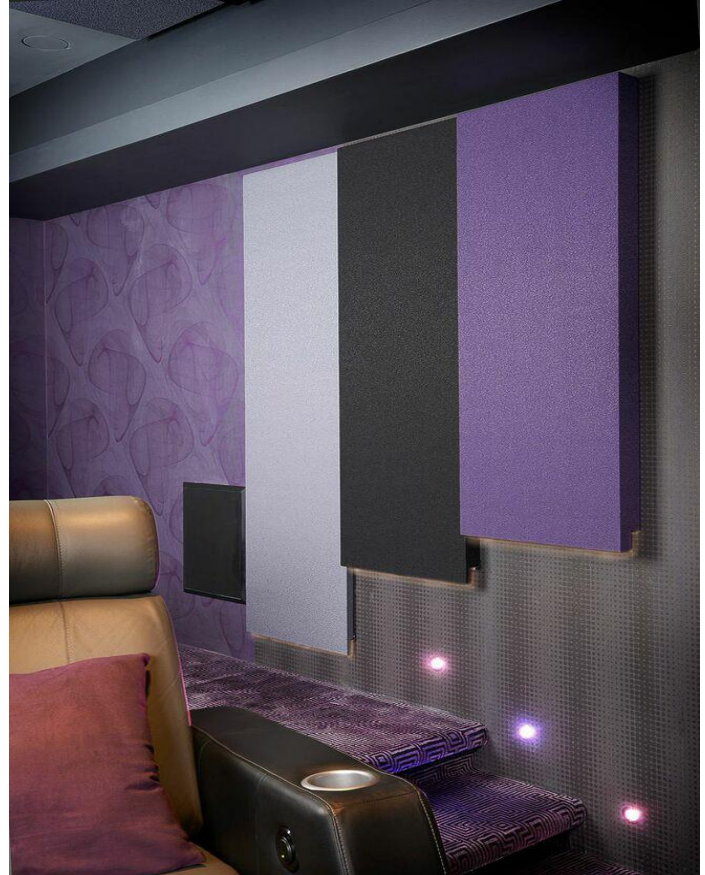

## MAINTENANCE

THE MAINTENANCE INSTRUCTION & RECOMMENDATIONS TO REMOVE DUST, PEN MARKS, STAINS ARE AS FOLLOWS –

- ✓ USE SMOOTH BRUSH OR VACUUM CLEANER FOR ANY TYPE OF DUST OR DIRT PARTICLES. ENSURE TO CLEAN IN ONE DIRECTION ONLY.
- ✓ USE FRESH GOOD QUALITY CLEANER FOR REMOVING PEN MARKS OR SMUDGES.
- ✓ USE VOLATILE SOLVENT BASED CLEANER FOR OIL BASED STAINS.

## WARRANTY



5 YEARS WARRANTY FOR CREDENCE CIPET PANEL

\* PLEASE REFER TO WARRANTY DOSSIER FOR WARRANTY CLAUSES & TERMS



## CONTACT US

**Call us:** +91-120-5105463  
+91-99900 49959

**Email:** [info@credenceindustries.com](mailto:info@credenceindustries.com) , [sales@credenceindustries.com](mailto:sales@credenceindustries.com)

