



NIMBUS
CLIP IN
METAL CEILING



BENEFITS

- Excellent Sound absorption (NRC 0.5 -0.7)
- Highly Aesthetic
- Humidity & fire resistant
- Stable & easy installation

AREA OF APPLICATION

- Office Area, Shopping Mall, Multiplex
- Airport, Exhibition Centers , Hotels
- Special Care centers, Hospitals
- Educational hubs, Residential

TECHNICAL DATA



ACOUSTIC
PERFORMANCE




EASY TO CLEAN



HUMIDITY RESISTANCE



COLOUR OPTION



RECYCLABLE



FIRE RETARDANT

Finish	Powder coated / Pre Coated
Size	600x600 mm, 600x1200 mm
Thickness	0.5 in Galvanized Iron, 0.7 in Aluminium, 0.5 in SS
Colour	Global White / *As per RAL Standards
NRC	0.5 – 0.7 *
Perforation	1.8 mm, 2.5 mm (* Custom perforation available)
Light Reflectance	>0.85%
Humidity Resistance	RH 99%
Hygiene	Anti Bacterial/Anti fungal/antimicrobial coating available

*MINIMUM 1.8 MM DIA PERFORATED GLIP IN METAL TILE WITH ACOUSTIC FLEECE HAS NRC 0.5, TO ENHANCE THE ACOUSTIC & NRC: SUGGESTIVE METHOD TO HAVE A LAYER OF APPORTIONS WOOL ON TILE OR CONTACT TO CREDENCE ACOUSTIC EXPERTS

COLOUR OPTIONS


WHITE/ * AS PER RAL STANDARD



*FOR RAL SHADES MOQ IS 500 SQM

INSTALLATION

NIMBUS CEILING TILE CAN BE EASILY INSTALLED AS PER BELOW MENTIONED COMPONENTS & PROCESS

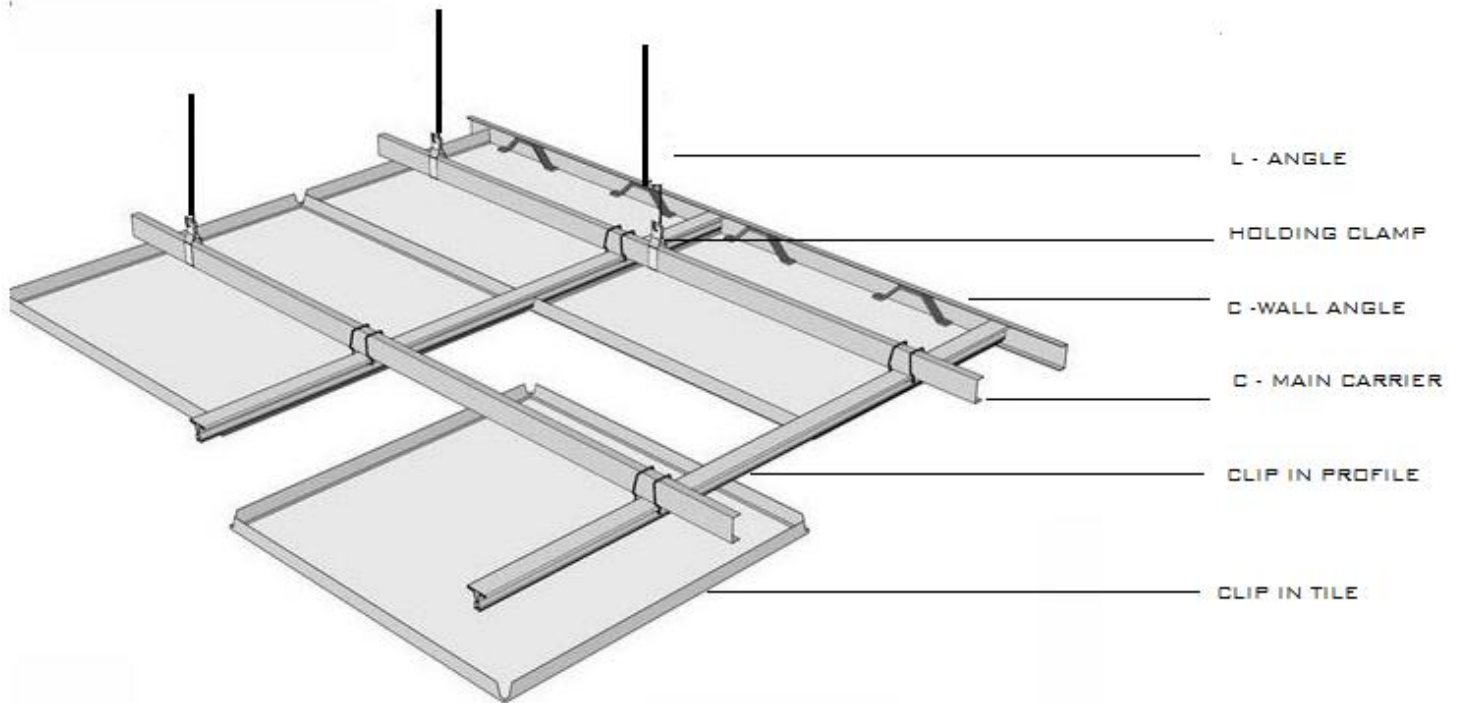



APPLICATION





MAINTENANCE

THE MAINTENANCE INSTRUCTION & RECOMMENDATIONS TO REMOVE DUST, PEN MARKS, STAINS ARE AS FOLLOWS –

- ✓ USE SMOOTH BRUSH OR VACUUM CLEANER FOR ANY TYPE OF DUST OR DIRT PARTICLES. ENSURE TO CLEAN IN ONE DIRECTION ONLY.
- ✓ USE FRESH GOOD QUALITY CLEANER FOR REMOVING PEN MARKS OR SMUDGES. ENSURE TO CLEAN IN ONE DIRECTION ONLY.
- ✓ USE VOLATILE SOLVENT BASED CLEANER FOR OIL BASED STAINS. ENSURE TO CLEAN IN ONE DIRECTION ONLY.

WARRANTY

- ✓ 5 YEARS WARRANTY FOR CREDENCE NIMBUS CEILING TILE

* PLEASE REFER TO WARRANTY DOSSIER FOR WARRANTY CLAUSES & TERMS

CONTACT US

Call us : +91-120-5105463
+91-99900 49959

Email: info@credenceindustries.com , sales@credenceindustries.com

