

World Most trusted 100 % Made In India Brand



BENEFITS

- Excellent Sound absorption (NRC 0.7-0.9)
- Available in various sizes & finish
- ➤ Multiple colours & pattern
- > Easy installation

AREA OF APPLICATION

- ➤ Auditoriums, Conferences Rooms
- Seminar Hall, Libraries, Indoor Stadium
- Cinema Hall, Home Theater
- Studio, Study room, Pubs

TECHNICAL DATA







EASY TO CLEAN



MULTIPLE


COLOUR OPTION



HUMIDITY RESISTANCE



FIRE RETARDANT





RECYCLABLE

Sizes	600 mm X 600 mm, 600 mm X 1200 mm, 1200 mm x 1200 mm, 300X1200 mm (* Custom size available)
Thickness	12mm, 15mm, 18mm
Front Finish	Melamine, Natural wood veneer, Paint etc.
Back Surface	Black Acoustic Fleece
NRC	0.7-0.9
Diameter of Holes	1 mm to 10 mm
Distance of Two Holes	8 mm to 32 mm
Density	≥800 kg/m3
Primary Material	High Density Moisture Resistant Fiber Board


TECHNICAL DATA

NRC CHART





PERFORATION PATTERN -

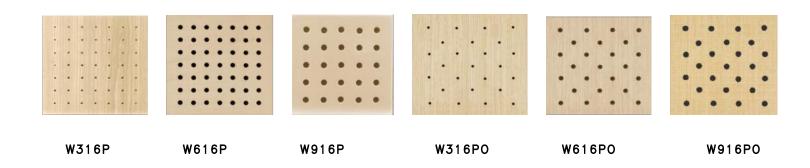

SLIT PATTERN -





INSTALLATION


INSTALLATION OF WARSA ACOUSTIC CEILING TILE/PANEL ON WALL-



SPLIT METAL BATTEN



SPLIT WOODEN BATTEN

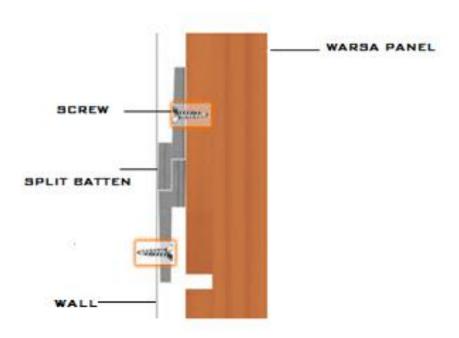

INSTALLATION DIAGRAM



MAINTENANCE

THE MAINTENANCE INSTRUCTION & RECOMMENDATIONS TO REMOVE DUST, PEN MARKS, STAINS ARE AS FOLLOWS -

- ✓ Use smooth brush/soft cloth or vacuum cleaner for any type of dust or dirt particles. Ensure to clean in one direction only.
- \checkmark Use fresh good quality cleaner for removing pen marks or smudges.
- ✓ USE VOLATILE SOLVENT BASED CLEANER FOR OIL BASED STAINS.



WARRANTY

- ✓ 5 YEARS WARRANTY FOR CREDENCE WARSA PANEL
 - * PLEASE REFER TO WARRANTY DOSSIER FOR WARRANTY CLAUSES & TERMS



CONTACT US

Call us: +91-120-5105463 +91-99900 49959

 $\textbf{Email:} \ \underline{info@credence industries.com} \ , \underline{sales@credence industries.com}$

