



PINE
WOOD WOOL
ACOUSTICAL
CEILING



World's Most trusted

100% Made In India Brand



BENEFITS

- Excellent Sound absorption (NRC 0.7-0.9)
- Aesthetic look
- Multiple colour option
- Environment friendly

AREA OF APPLICATION

- Auditoriums, Conferences Rooms
- Seminar Hall, Libraries, Indoor Stadium
- Cinema Hall, Home Theater
- Studio , Study room, Pubs

TECHNICAL DATA




BEST ACOUSTIC
PERFORMANCE



EASY TO CLEAN



HUMIDITY
RESISTANCE



RECYCLABLE



MULTIPLE
COLOUR OPTION




FIRE RETARDANT

 TECHNICAL DATA

Sizes	600mmx600mm, 600mmX900mm, 600mmX1200mm, 500mmX2000mm Other sizes can be custom ordered *
Thickness	10mm, 15mm, 20mm, 25mm, 40mm, 50mm, 75mm,100mm
Finish	Spray Painted or Fabric wrapped
Colour	Multi Colour Range
NRC	0.7 - 0.90
Density	400 kg/m ³ -- 800 kg/m ³
Thermal Conductivity	0.65 W/mk
Edges	Square, Bevel
Fire Resistance	B1 Class A
Non Combustibility	Mass loss 52.27 % as per ISO 1182
Primary Material	100 % Pure wood fiber & Magnesium


TECHNICAL DATA

NRC CHART

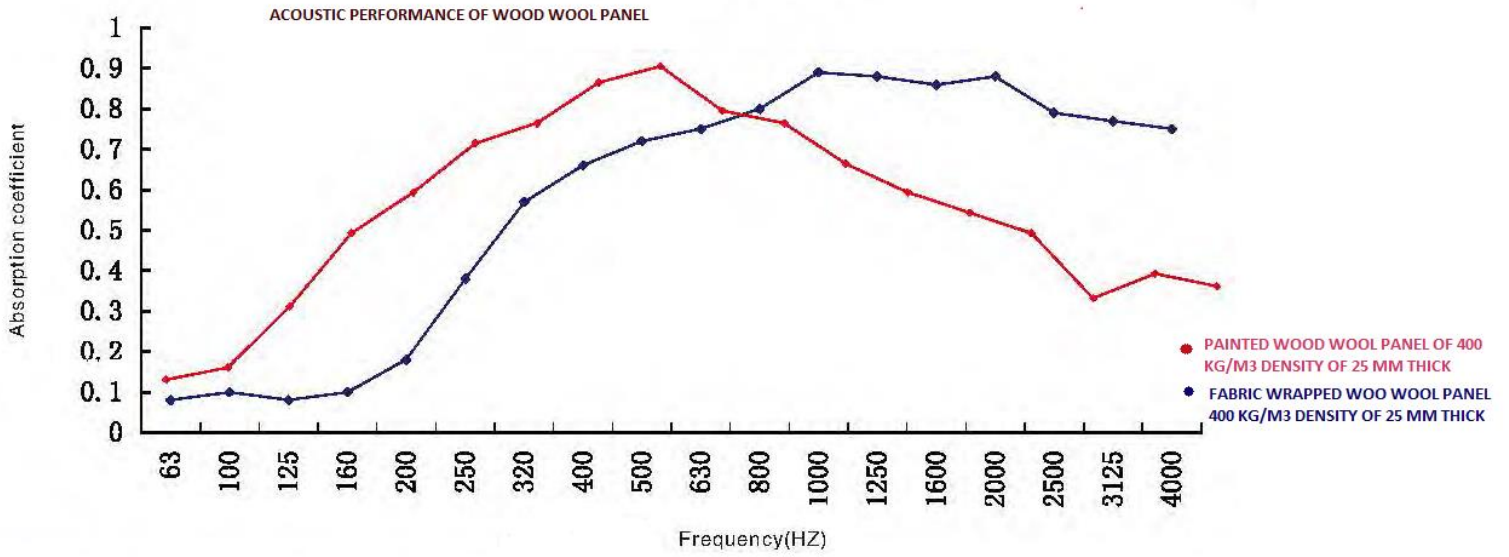



COLOUR OPTIONS


MULTI COLOUR
RANGE
AS PER RAL STANDARD*

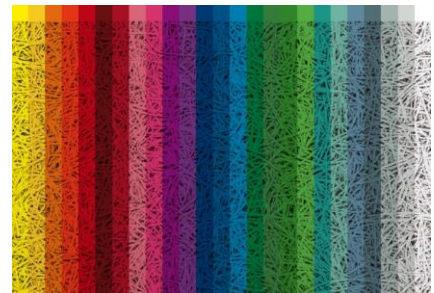

INSTALLATION

WOODWOOL CEILING TILE CAN BE EASILY INSTALLED ON METAL T-GRID

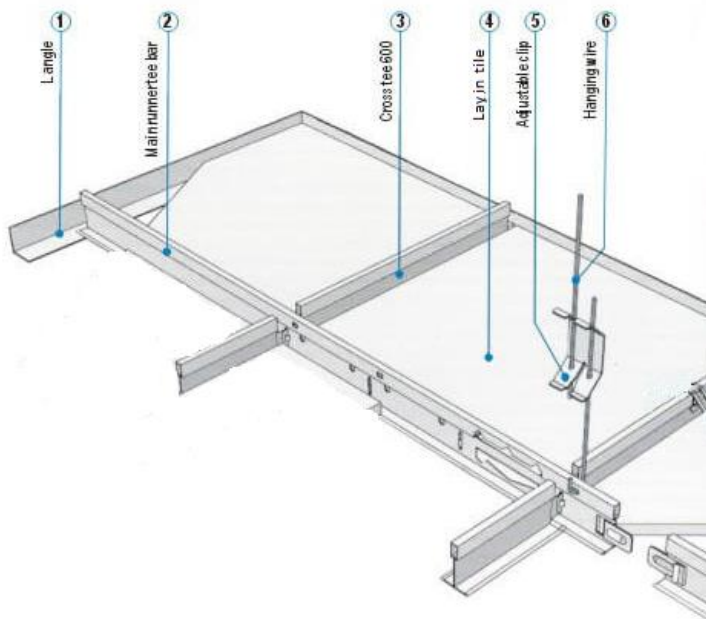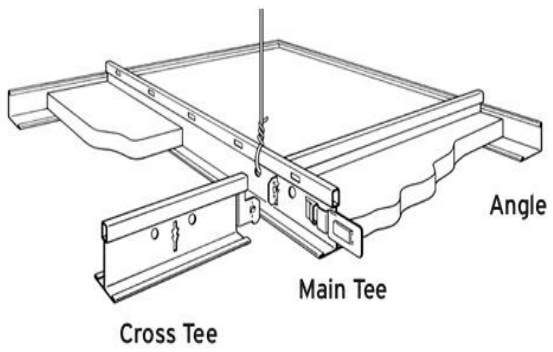

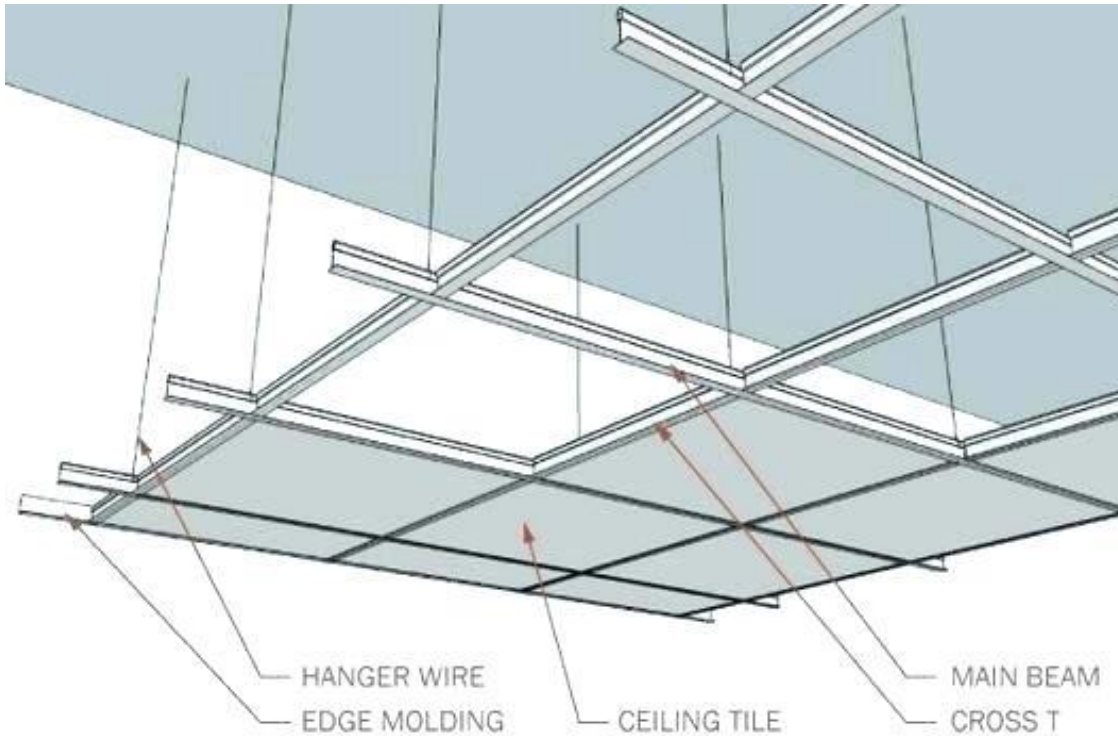

MAINTENANCE

THE MAINTENANCE INSTRUCTION & RECOMMENDATIONS TO REMOVE DUST, PEN MARKS, STAINS ARE AS FOLLOWS –

- ✓ USE SMOOTH BRUSH OR VACUUM CLEANER FOR ANY TYPE OF DUST OR DIRT PARTICLES. ENSURE TO CLEAN IN ONE DIRECTION ONLY.
- ✓ USE FRESH GOOD QUALITY CLEANER FOR REMOVING PEN MARKS OR SMUDGES. ENSURE TO CLEAN IN ONE DIRECTION ONLY.
- ✓ USE VOLATILE SOLVENT BASED CLEANER FOR OIL BASED STAINS. ENSURE TO CLEAN IN ONE DIRECTION ONLY.

WARRANTY

- ✓ 5 YEARS WARRANTY FOR CREDENCE PINE PANEL

* PLEASE REFER TO WARRANTY DOSSIER FOR WARRANTY CLAUSES & TERMS

CONTACT US

Call us: +91-120-5105463
+91-99900 49959

Email: info@credenceindustries.com , sales@credenceindustries.com

